





PAYVIT INDIA PVT. LTD.

Costumer care : +91 87704 71437

Email : customerservice.context@payvit.com

Web : www.payvitindia.com

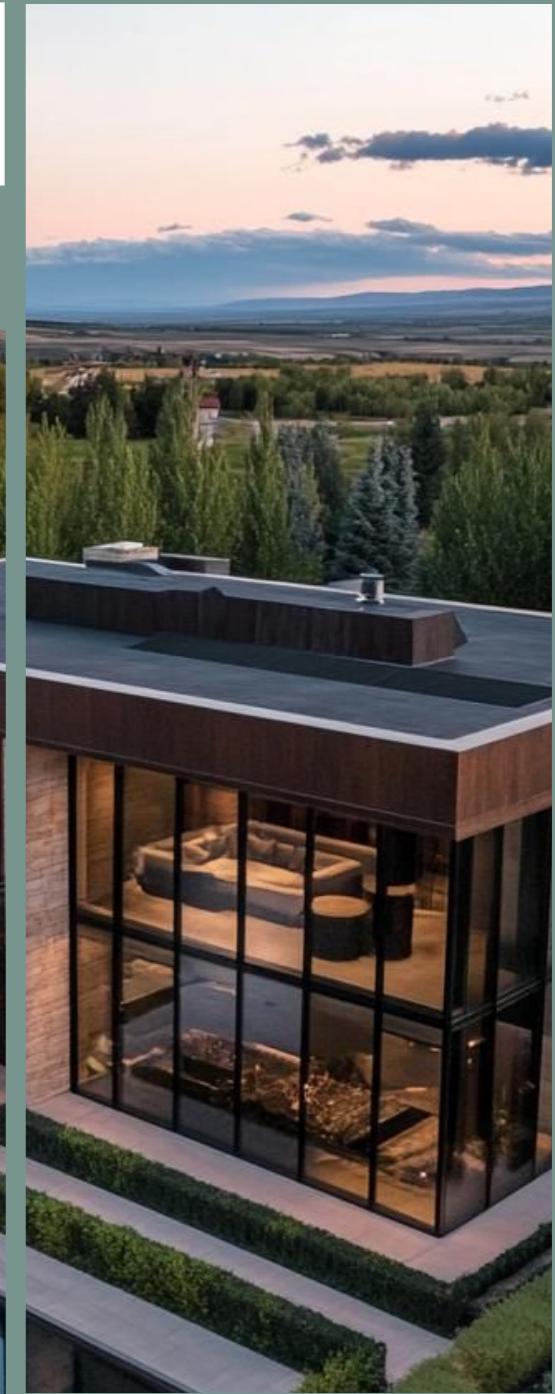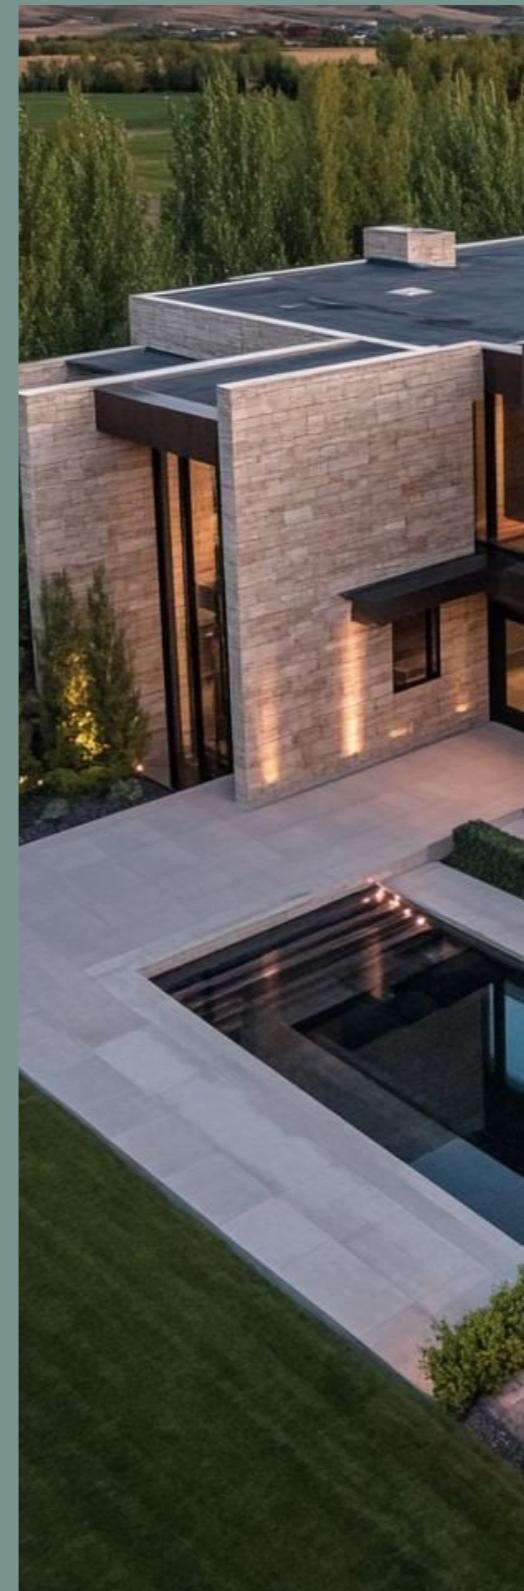

Product Portfolio




OUR STORY

Payvit India Pvt. Ltd. is India's emerging leader in the building materials industry. With a commitment to quality, innovation, and sustainability, we provide high-performance Building materials that help build the structures of tomorrow.

Our goal is to create long-lasting trust through consistent quality and contribute to the vision of a stronger, greener India. From ceramic tiles to granite and marble, Payvit products deliver superior bonding strength, durability, and precision in every application.




MISSION, VISION & VALUES




MISSION

Consistency, trust, Contribution, Green world & protect environment.



VISION

India's largest and leading building material company that becomes the foundation of the structure of a newly developed India.



VALUES

1. To keep the product's quality and good value's consistent
2. Along with providing a good product, earning the customer's trust is also important.
3. To contribute to the Structure of a new India.
4. To contribute to the creation of a green world and protect the environment.





Floor Tiles



Wall Tiles



Outdoor Tiles



Large Scale Tiles



Natural Stone



Glass Tiles

APPLICATION


- Our products are designed in a way to suit both indoor and outdoor applications.
- Our complex chemical mixtures ensure you have long lasting applications and peace of mind.



Adhesives for all types of tiles & natural stones



Wide range of colors for Epoxy grouts in solid and sparkle finishes



High strength grout for all types of tiles & natural stones



Heavy duty waterproofing for interior & exterior applications



- **TILE & STONE FIXING SOLUTIONS**
- **SURFACE PREPARATION SOLUTIONS**





PAYVIT TILE ADHESIVE T-10

GREY & WHITE

NON-SHRINK CEMENT BASED TILE ADHESIVE



PRODUCT DETAILS

PAYVIT TILE ADHESIVE T-10 is a non-shrink, polymer modified and grey cement-based thin set tile adhesive for fixing high porosity tiles like ceramic/clay, terra cotta and quarry tiles of regular size on cementitious surfaces like plaster or concrete.

STANDARD COMPLIANCE

Confirms to IS 15477: 2019 (TYPE 1T) & EN 12004: 2017 (C1T)

FEATURES & BENEFITS

- NON-SHRINK PROPERTY
- POLYMER MODIFIED
- GOOD WORKABILITY

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- Interior floor & Wall application for dry areas only.
- Cement-based substrates like cement plaster, cement concrete, cement screed.
- Clay & ceramic (non-vitrified), terra cotta and quarry tiles.

COVERAGE*

57 – 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness. Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27°C in Standard laboratory condition.

RECOMMENDATION

For Tile size not more than 300 X 300 mm (<1Ft x 1Ft)

PACKAGING

20 Kg bag

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



PAYVIT TILE ADHESIVE T-20

GREY & WHITE

RECOMMENDED FOR TILE-ON-TILE APPLICATION



PRODUCT DETAILS

PAYVIT TILE ADHESIVE T-20 is a polymer-modified thin-set cement-based tile adhesive for fixing all types of Vitrified/fully vitrified tiles, glass mosaic tiles, stone tiles & slabs of regular size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor application, in dry & wet areas. It is also recommended to Tile-on-Tile application.

STANDARD COMPLIANCE

Confirms to IS 15477: 2019 (TYPE 2 T) & EN 12004: 2017 (C2T)

FEATURES & BENEFITS

- HIGH BOND STRENGTH
- SAG RESISTANCE
- IDEAL FOR TILE-ON-TILE APPLICATION

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- Interior & exterior floor & wall applications for wet areas, kitchen, toilets, submerged areas like – swimming pools & fountains.
- Cement-based substrates like cement plaster, cement concrete, cement screed.
- Suitable for Vitrified/fully vitrified tiles, Glass mosaic tiles, Stones tiles & slabs (All types).

COVERAGE*

57 – 60 Sq Ft / 20Kg (at 3mm thickness)

*Coverage will vary depending on trowel notch size, type, size of tile and substrate smoothness and evenness. Notch Trowel 6x6x6mm used during coverage calculation Coverage Calculated at 27°C in Standard laboratory condition.

RECOMMENDATION

For Tile size < 1200 X 1200 mm (< 4 Ft X 4 Ft)

PACKAGING

20 Kg bag

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



PAYVIT TILE ADHESIVE T-30

GREY & WHITE

RECOMMENDED FOR NATURAL STONES, GRANITE, MARBLE & GLASS TILES



PRODUCT DETAILS

PAYVIT TILE ADHESIVE T-30 is a polymer modified tile adhesive, suitable mainly for natural stones, granite marble and glass tiles of regular and large size. It is suitable for both vertical and horizontal surfaces, over the cementitious substrate for indoor and outdoor application.

STANDARD COMPLIANCE

Confirms to IS 15477 : 2019 (TYPE 3 T) & EN 12004 : 2017 (C2TE)

FEATURES & BENEFITS

- SUPERIOR BOND STRENGTH
- SAG RESISTANCE
- GOOD FLEXIBILITY

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- External wall & porch Floor and wall application - Kitchen counter top.
- Suitable for Plaster or Concrete substrates.
- All types of Ceramic, clay, basalt tiles, Vitrified wall tiles, Fully Vitrified, Stone Tiles, Glass Mosaic, Porcelain Tiles and all natural stone tiles.

COVERAGE*

58 – 60 Sq Ft / 20Kg (at 3mm thickness)

RECOMMENDATION

For Tile size more than 300X 300 mm and less than 600X600 mm. (< 2Ft X 2Ft)

PACKAGING

20 Kg bag

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



PAYVIT TILE ADHESIVE T-40

GREY & WHITE

RECOMMENDED FOR INSTALLATION ON DRY WALLBOARD SUBSTRATES



PRODUCT DETAILS

PAYVIT TILE ADHESIVE T-40 is intended for installation on dry wallboard substrates. This tile adhesive is suitable for all types of stones and tiles except metal or engineered stone tiles.

STANDARD COMPLIANCE

Confirms to IS 15477: 2019 (TYPE 4 T) & EN 12004: 2017 (C2TES1)

FEATURES & BENEFITS

- EXCELLENT BOND STRENGTH
- SUPERIOR GRAB & NON-SAG
- HIGHLY FLEXIBILITY

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- Interior floor & Wall application for dry areas only.
- Gypsum boards, plywood, wood, calcium silicate boards, medium density fiber boards, fiber cement boards, cement boards, bison panel etc.
- All types of tiles and stones except metal tiles or engineered stone to be installed on dry wall board substrates.

COVERAGE*

58 – 60 Sq Ft / 20Kg (at 3mm thickness)

RECOMMENDATION

For Tile size < 1200 X 1200 mm (< 4 Ft X 4 Ft)

PACKAGING

20 Kg bag

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 12 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

*All Tile Size mentioned are as per IS. This may vary from site to site during actual application



PAYVIT BLOCK JOINTING MORTAR

PREMIX HIGH-QUALITY MORTAR



PRODUCT DETAILS

PAYVIT BLOCK JOINTING MORTAR is a premix high-quality mortar for joining and bonding of all types of substrate like AAC Blocks, Concrete Blocks, Hollow Blocks and Bricks.

FEATURES & BENEFITS

- NO WATER CURING
- EXCELLENT BOND STRENGTH
- OPTIMUM WATER-MORTAR RATIO

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- AAC blocks
- Concrete blocks (solid & hollow)
- Bricks
- Suitable substrate

COVERAGE*

58 – 60 Sq Ft / 20Kg (at 3mm thickness)

RECOMMENDATION

**155 – 170 Sq Ft/40 Kg bag for 4X8X16" wall

PACKAGING

40 Kg bag

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 6 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.

** Above coverage calculated at Std Laboratory conditions ** Coverage will vary depending on actual site conditions



PAYVIT EPOXY TILE GROUT

A SOLVENT FREE TWO-PART EPOXY GROUT FOR
HORIZONTAL & VERTICAL APPLICATIONS



PRODUCT DETAILS

EPOXY TILE GROUT has high compressive, flexural and shear adhesion strength. It is resistant to acids, alkalis, corrosive agents, cleaning agents, sea, and salt water. It is uniform in colour thereby adding durability and enhancing the beauty of your floor tiles.

STANDARD COMPLIANCE

Confirms to RG as per EN 13888:2009

FEATURES & BENEFITS

- STAIN RESISTANT
- BACTERIA & FUNGAL RESISTANT
- NON SHRINK

AREAS OF APPLICATION, TYPE OF SUBSTRATE & TYPE OF TILE

- Wet areas like – Kitchen, Bathroom, swimming pools etc.
- interior floor & floor application for dry areas – Living room, bedroom, terraces, balconies etc.
- Industrial applications – plants, laboratories, dairies.
- All types of tiles and natural stone tiles.
- Recommended for ceramic, vitrified tiles and non-vitrified tiles and stone tiles.

COVERAGE*

Dependent on the size of tiles and width of joints (kg/m²)

FORMULA FOR THE COVERAGE CALCULATION $C = 1.75 \times H \times T \times [(L + W) / (L \times W)]$

C – Tile grout coverage (kg/m²)

H – Thickness of tile (mm)

T – Width of joint (mm)

L – Length of tile (mm)

W – Width of tile (mm)

AVAILABLE

In 21 colours

PACKAGING

Net Quantity 5 kg (4.5 kg Resin + 0.5 kg Hardener)

SHELF LIFE & STORAGE

The shelf life in original factory sealed packing is 24 months from date of manufacturing when stored under cover & out of direct sunlight. Protect from extremes of temperature.